

**WarmRain** Specification for model:  
B 530 (left hand seat) and B 531 (right hand seat)



Warm Rain models B 530 (left hand seat and right hand plumbing) and the B 531 (right hand seat – left hand plumbing) shower base fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass has a minimum content of 18 % fiberglass.

The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass. The base is an integral part of the unit.

The inside bottom floor will be textured. The texture bottom floor meets and exceeds ASTM Safety Specification F-462.

The unit will measure 60" x 30" x 24.5" and has a 3.5" front outside threshold with an inside dam that is 1.2" by the seat and slopes to 2.25" by the drain.

The B 530 and B 531 are available with the Above Floor rough-in. Please see Measurement Sheet B 530-1 AFR for more specific measurements.


The front apron of all units will have wood support along the entire length to help prevent the corners from chipping or bowing in or out.

These Warm Rain shower bases arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the Home Innovation Research Labs, formerly known as the National Association of Home Builders NAHB.





**WarmRain** Specification for model:

B 530 (left hand seat) and B 531 (right hand seat)

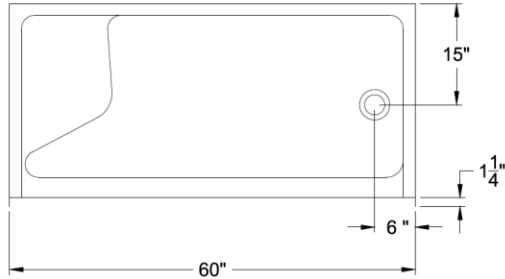

WR 530-1 BASE

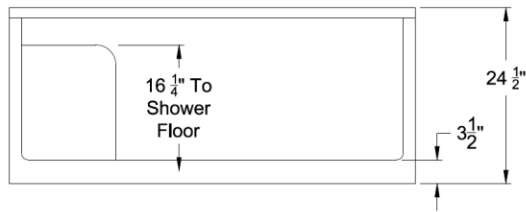

12-17-14



Warm Rain Corporation, P.O. Box 600, Hancock, MI 49930

Voice: 906-482-3750 Fax: 906-482-2585 email: [tedk@warmrain.com](mailto:tedk@warmrain.com) website: [www.warmrain.com](http://www.warmrain.com)