



Installation Notes for:



# Removable SKIRTS

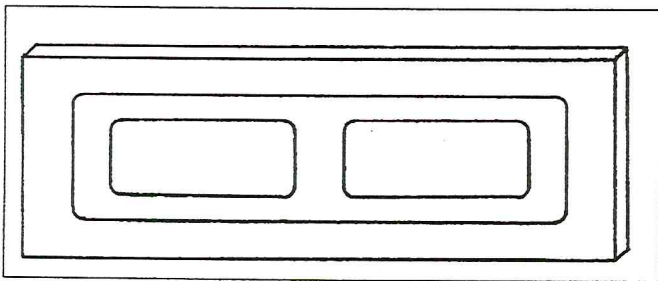

**Model WR-S-5 Acrylic Designer 5' Apron**  
**Model WR-S-6 Acrylic Designer 6' Apron**

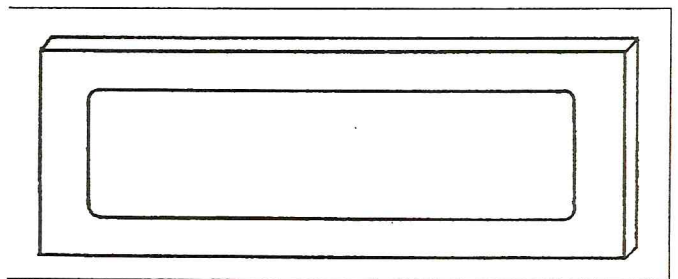

**Model WR-S-5B Acrylic 5' Builder Apron**  
**Model WR-S-6B Acrylic 6' Builder Apron**

1. Build 3 sided frame for Swirlpool, leaving front open (skirt is designed to carry load in front.) 20" High
2. Level frame all around
3. Plumb front of frame.
4. Slip skirt under Swirlpool, leaving top of skirt radius fully exposed.
5. Screw sides of skirt into studs (3 sheetrock screws per side.)
6. Screw bottom of skirt to sub-floor.



**Great Lakes Plastics Corporation**

P.O. Box 600 • Houghton County Airpark • Hancock, Michigan 49930 • (906) 482-3750  
Fax: (906) 482-2585 • E-mail: tedk@warmrain.com • Website: www.warmrain.com