

WarmRain Specification for model:

WR 744-D-FF (right hand plumbing) and WR 745-D-FF (left hand plumbing)
EXTRA DEEP



Warm Rain models WR 744-D-FF (right hand plumbing) and WR 745-D-FF (left hand plumbing) Front-Fit™ remodeling tub/showers fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass has a minimum content of 18 % fiberglass.

The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass. The base is an integral part of the unit.

The inside bottom floor will be textured. The texture bottom floor meets and exceeds ASTM Safety Specification F-462.

The unit will measure 60" x 33" x 76.5" and have a 20" apron height. The inside dam will measure 17" and the overflow will be 15" above the floor.

The inside sump area will measure 55" x 23" at the top of the well and 44" x 19" at the bottom of the well.

The front apron of all units will have wood support along the entire length to help prevent the corners from chipping or bowing in or out.

The WR 744-D-FF and WR 745-D-FF Front-Fit™ showers will have wood support for a shower door and a curtain bracket.

These units have the option of being reinforced for the future installation of grab bars and the above floor rough-in.

These Warm Rain tub/showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the Home Innovation Research Labs, formerly known as the National Association of Home Builders NAHB.




Warm Rain Corporation, P.O. Box 600, Hancock, MI 49930

Voice: 906-482-3750 Fax: 906-482-2585 email: tedk@warmrain.com website: www.warmrain.com



Page 1 of 2

WarmRain Specification for model:

WR 744-D-FF (right hand plumbing) and WR 745-D-FF (left hand plumbing)
EXTRA DEEP

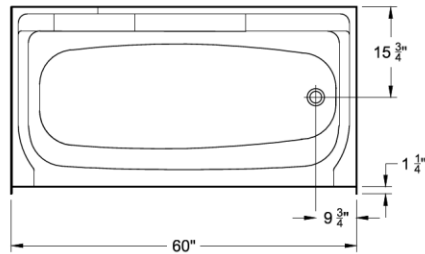

WR 744/5 D FF

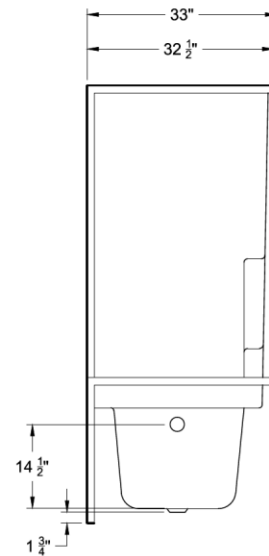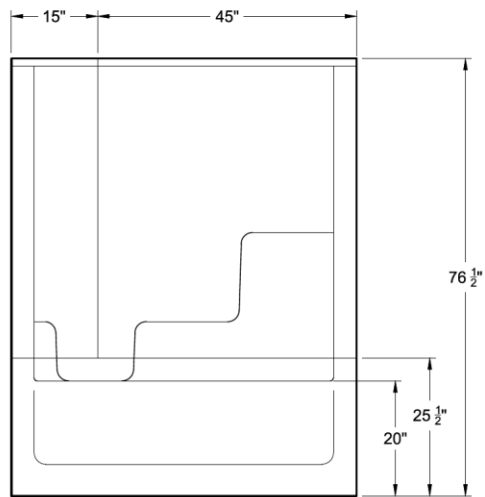

9-14-12



Warm Rain Corporation, P.O. Box 600, Hancock, MI 49930

Voice: 906-482-3750 Fax: 906-482-2585 email: tedk@warmrain.com website: www.warmrain.com